


PUTKENPUHDISTUSTYÖKALUT

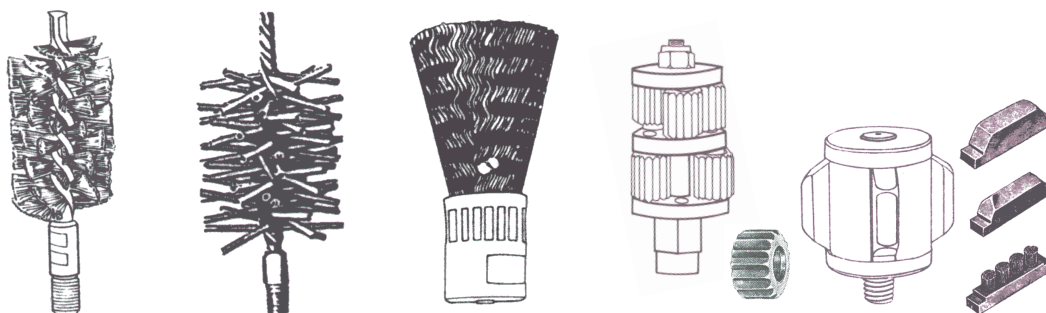

Putken sisämitta ø mm	DS	A	SHK	PH varatrissa	XB
20,5			903		XB2BB
22,0					XB2A
24,0					XB2B
25,5			904		XB2C
27,0					
28,5			905		XB2D
30,0					XB3B
31,5			906	31,5 ø 12	
33,5					XB3C
35,0				35,0	XB3D
36,5					XB4B
38,0			907	38,0	
39,5					XB4C
41,5				41,0 ø 16	
43,0					XB4D
44,5			908	44,5	XB4B
46,0					XB5C
47,5				47,5	
49,0					XB5D
51,0			909	51,0	
52,5					
54,0				54,0 ø 19	XB6B
55,5					XB6C
57,0			910	57,0	XB6D
58,5					
60,5				60,5	XB6E
62,0					
63,5			911	63,5	
65					XB7
66,5			912	66,5	
68,5					
70,0			913	70,0 ø 25	XB7
71,5					
73,0				73,0	
74,5			914		
76,0				76,0	