

PARIMETALLILÄMPÖMITTARIT

TAKALÄHTÖISET

M-642T ø 63 mm

M-103T ø 100 mm

M-152T ø 150 mm

Asteikot (°C)	Upotussyvyydet (mm)
0 + 40	45
0 + 60	65
0 + 80	100
0 + 100	150
0 + 120	200
0 + 160	250
0 + 200	300
0 + 250	
0 + 300	

Suojataskun materiaalit:





Messinki

Haponkestävä teräs (AISI 316Ti)

ALALÄHTÖISET

M-110T ø 100 mm

M-151T ø 150 mm

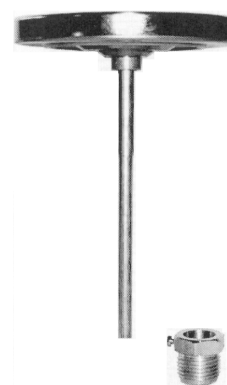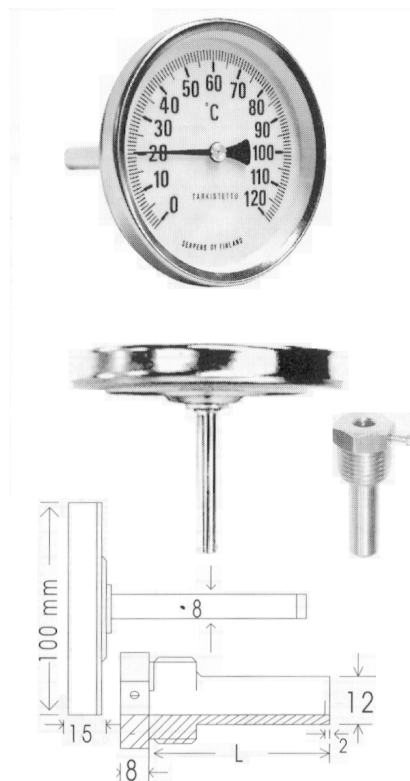

SAVUKAASULÄMPÖMITTARIT

TAKALÄHTÖISET

407 N ø 51 mm, nippa R 1/4"

508 N ø 83 mm, nippa R 1/2"

M-103T/S ø 100 mm, nippa R 1/2"

Asteikot (°C)	Upotussyvyydet (mm)
+ 50 + 400	200
+ 50 + 500	250
	300
	500